


Features

LED Indicators

The LEDs located on the top of your SoundStation2W™ indicate the current status of your conference telephone:

- Green - your call is in progress.
- Blinking green - a call is incoming.
- Red - your call is muted.
- Blinking Red - your call is on hold.

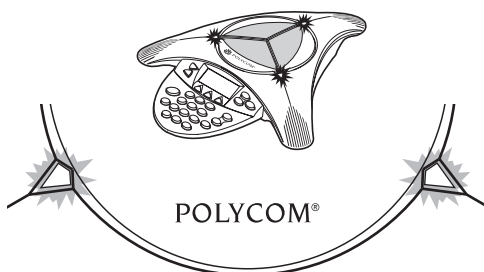

Buttons

Menu

Displays a menu of settings and options.

Exit

Exits from current screen to previous menu.

Soft Keys

The screen will display labels for these keys, to identify their context-sensitive functions.

Phone

Answers incoming calls, dials a call, ends a call, and provides dial tone.

Conference

Call, join, or delete additional call participants during a conference call.

Dial Pad

These 12 keys provide the 10 digits, the 26 alphabetic characters, and special characters available in context sensitive applications.

Scroll

Navigate up or down through displayed lists.

Select

Choose a menu item.

Volume

Use these to adjust the volume of the handset, headset, speaker, and ringer, as well as the display contrast.

Mute

Toggle microphone on or off during a conversation.

Understanding the Display

The diagram shows a display screen with the following elements:

- Signal Strength:** Represented by four bars and the text "Signal".
- Battery Life:** Represented by a battery icon and the text "05:00".
- Information Area:** The central area of the screen displaying "(312) 555-1212".
- This Phone's Number:** The number "(312) 555-1212" is displayed in the information area.
- Soft Key Functions:** Three keys at the bottom labeled "SP DIAL", "PH BOOK", and "REDIAL".

Soft Key Functions
The screen will display labels for these keys, to identify their context-sensitive functions.