


Features

LED Indicators

The LEDs located on the top of your SoundStation2W™ indicate the current status of your conference telephone:

- Green - your call is in progress.
- Blinking green - a call is incoming.
- Red - your call is muted.
- Blinking Red - your call is on hold.

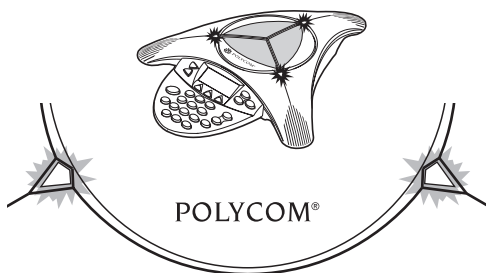

Buttons

Menu

Displays a menu of settings and options.

Exit

Exits from current screen to previous menu.

Soft Keys

The screen will display labels for these keys, to identify their context-sensitive functions.

Phone

Answers incoming calls, dials a call, ends a call, and provides dial tone.

Conference

Call, join, or delete additional call participants during a conference call.

Mute

Toggle microphone on or off during a conversation.

Dial Pad

These 12 keys provide the 10 digits, the 26 alphabetic characters, and special characters available in context sensitive applications.

Scroll

Navigate up or down through displayed lists.

Select

Choose a menu item.

Volume

Use these to adjust the volume of the handset, headset, speaker, and ringer, as well as the display contrast.

Understanding the Display

A diagram of the display screen with labels pointing to various elements:

- Signal Strength**: Points to the signal strength indicator (four bars) and the number (312) 555-1212.
- Battery Life**: Points to the battery level indicator (a bar with a full icon) and the time 05:00.
- Information Area**: Points to the entire display area.
- This Phone's Number**: Points to the number (312) 555-1212.
- Soft Key Functions**: Points to the bottom of the screen showing three buttons: SP DIAL, PH BOOK, and REDIAL.

The screen will display labels for these keys, to identify their context-sensitive functions.